



UHF VEHICULAR ANTENNA

400 ÷ 470 MHz

14128010

BSU2

POLOMARCONI.IT



POLOMARCONI offers a very wide range of wireless products. Our products can be tailored according to the customer's need.


PMR

Electrical Specifications

Type	1/4 λ
Frequency range (MHz)	400 ÷ 470
Impedance (Ω)	50
VSWR	< 1.5:1
Continuous Max. Power (W)	30
Polarization	vertical
Gain (dBd)	0
Operation Temp. Range ($^{\circ}\text{C}$)	-35° ÷ +80°

Mechanical Specifications


Total length (mm)	205
Mounting hole diameter (mm)	\varnothing 19 mm
Supplied cable	4.5m RG 58 without connector
Whip	Black Inox Steel
Base	Waterproof "BS" mount

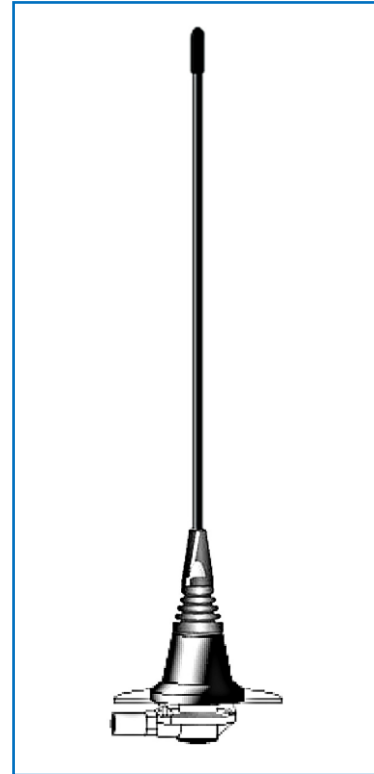



MOUNTING INSTRUCTIONS



BS Base



CUTTING DIAGRAM AND VSWR

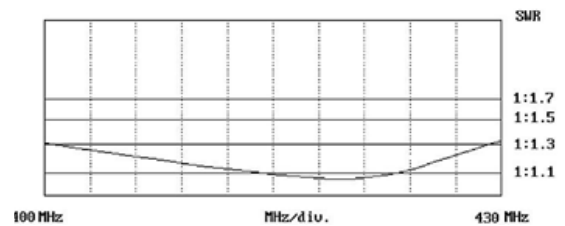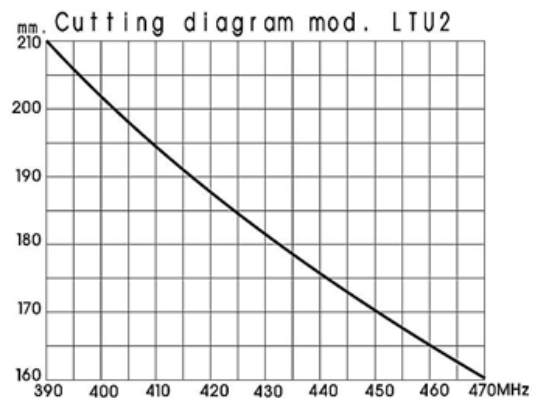

BY



Made in Italy. We reserve the right to modify these data without any notice.