



HALF WAVE DIPOLE UHF ANTENNA

R-F 330 NZ, 435 ÷ 470 MHz

R-4.05.006.01

POLOMARCONI.IT

POLOMARCONI offers a very wide range of wireless products. Our products can be tailored according to the customer's need.


PMR

Electrical Specifications

Type	Half Wave Vertical Dipole
Frequency band (MHz)	435 ÷ 470
Input Impedance (Ω)	50
VSWR at resonant frequency	< 1.5:1
Continuous Max. Power (W)	100
Polarization	vertical
Gain (dBd)	3
HPBW ($^{\circ}$) - E-plane	30
HPBW ($^{\circ}$) - H-plane	Omni
Operating Temp. Range ($^{\circ}$ C)	-35 ÷ +80

DESCRIPTION

Half wave vertical dipole antenna for UHF band.
All parts of the antenna are DC grounded from lightning protection.

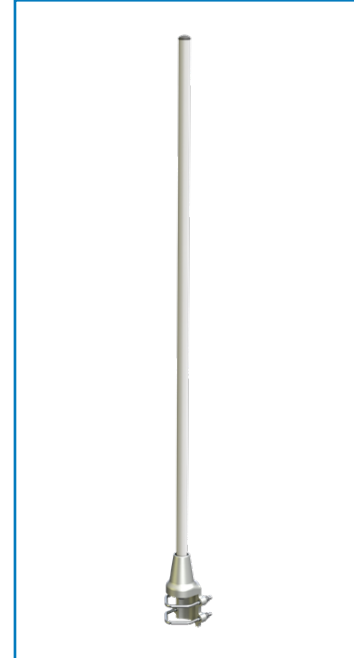

Mechanical Specifications

Connector	N f	
Length (mm)	1270	
Weight (kg)	1.2	
Max. wind velocity (km/h)	200	
Materials	elements radome	brass passivated fiberglass
Mounting hole (mm)	33 ÷ 60	
Weather Protection	Resistant against moisture penetration rain and snow	

Radiation Patterns

