



UHF PASS REJECT SIX RESONATORS DUPLEXER

420 ÷ 470 MHz

R-7.11.016.01
R-6X 110 Z

POLOMARCONI.IT




POLOMARCONI offers a very wide range of wireless products.
Our products can be tailored according to the customer's need.

PMR

Electrical Specifications

Frequency Band (MHz)	420 ÷ 470
Channel Spacing (MHz)	> 4
Impedance (Ω)	50
VSWR	< 1.4:1
Continuous Max. Power (W)	100
TX-RX Insertion Loss (dB)	< 1.2
TX-RX Isolation (dB)	\geq 85
Frequency Stability (ppm/°C)	4.5
Operation Temp. Range (°C)	-35° ÷ +80°

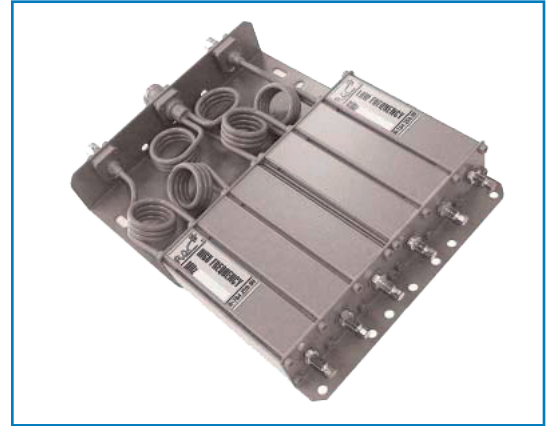

Mechanical Specifications

Connectors	TX-RX Antenna	BNC f N f
Dimensions (mm)	33 × 157 × 230	
Weight (kg)	< 1.4	
Material	Aluminium Alloy	

BY



Made in Italy. We reserve the right to modify these data without any notice.