



2 CHANNELS VHF HYBRID COMBINER

117 ÷ 144 MHz

T06010404

POLOMARCONI.IT

POLOMARCONI offers a very wide range of wireless products. Our products can be tailored according to the customer's need.


ATC

Electrical Specifications

Frequency Band (MHz)	117 ÷ 144
Impedance (Ω) unbalanced	50
VSWR	$\leq 1.5:1$
Continuous Max. Power (W)	100
Insertion Loss (dB)	≤ 3
Insertion Loss (dB): cables and others	≤ 0.3
Isolation (dB) Tx to Tx	>20
Operating Temp. Range ($^{\circ}\text{C}$)	-10 ÷ +55 (RH 90%, Non-Condensing)
Electrical Safety	EN 60950 EN 60215
EMI / EMC	ETSI EN 301 489-1 /-18

Mechanical Specifications

Connectors	N f
Dimensions	2U x 19" x 500mm
Weight (kg)	3

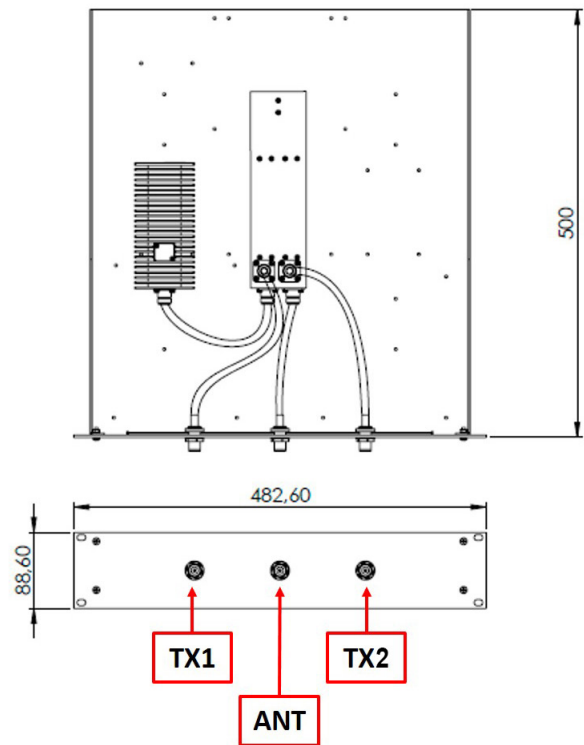

Electric Schematics

