



3 CHANNELS UHF RX SINGLE CAVITY COMBINER in Star Point Configuration

T06100604


POLOMARCONI.IT

POLOMARCONI offers a very wide range of wireless products.
Our products can be tailored according to the customer's need.

ATC

Electrical Specifications

Frequency band (MHz)	225 ÷ 400	
Impedance (Ω)	50	
Return Loss (dB)	≥ 15	
Max Continuous Power (W) per channel	100	
Insertion Loss (dB)	@ $f_0 \pm 0.5\% f_0$	< 1.5
Filter Selectivity (dB) with I.L.: 1.0 dB	@ $f_0 \pm 1\% f_0$	> 21
	@ $f_0 \pm 2\% f_0$	> 27
Isolation (dB) @ I.L.: 1.5 dB	@ $f_0 \pm 0.5\% f_0$	> 22
Extended Temp. Range ($^{\circ}\text{C}$)	$-10 \div +55$	
Electrical Safety	IEC 60950-1	
	EN 60950-1	
Operating Environment	ETS 300 019-1-2	
	ETS 300 019-2-3	
	Class 3.1E	
EMC	ETSI EN 301	
	489-1	
	489-22	

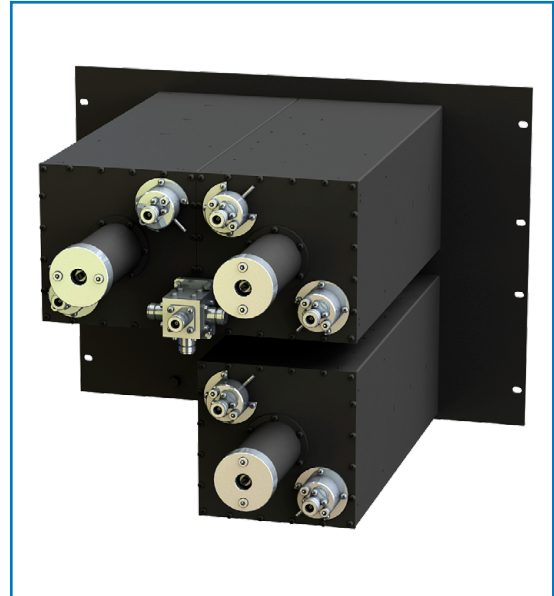

Mechanical Specifications

Connectors	Nf
Dimensions (mm)	8U x 19" x 485
Weight (kg)	< 17
Front Panel Color	RAL 9011

Electric Schematics

