



4 CH UHF RX SINGLE CAVITY COMBINER in Star Point Configuration

T06110616

POLOMARCONI.IT

POLOMARCONI offers a very wide range of wireless products.
Our products can be tailored according to the customer's need.

ATC


Electrical Specifications

Frequency band (MHz)	225 ÷ 400	
Impedance (Ω)	50	
Return Loss (dB)	≥ 15	
I.L. (dB) @ ch. spacing: @ $f_0 \pm 1\% f_0$	2	
Isolation (dB) @ ch. spacing: @ $f_0 \pm 1\% f_0$	> 19	
Filter Selectivity (dB) at mid band with I.L.: 2 dB	@ $f_0 \pm 1\% f_0$	> 18
	@ $f_0 \pm 2\% f_0$	> 24
Max Continuous Power (W) per channel	100	
Operating Environment	ETS 300 019-1-2 ETS 300 019-2-3 Class 3.1E	
Electrical Safety	IEC 60950-1 EN 60950-1	
EMC	ETSI EN 301 489-1 489-22	

Mechanical Specifications

RF Connectors	Nf
Dimensions (mm)	3U x 19" x 650
Weight (kg)	< 11
Colour	RAL 9011
Extended Temp. Range ($^{\circ}\text{C}$)	$-10 \div +55$

Electric Schematics

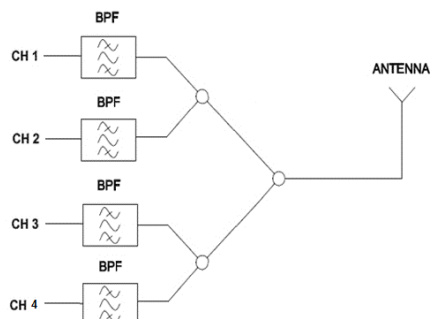

DIMENSIONS (mm)

