



UHF HIGH SELECTIVITY BAND PASS FILTER DUPLEXER

380 ÷ 470 MHz

T06210731

POLOMARCONI.IT




POLOMARCONI offers a very wide range of wireless products.
Our products can be tailored according to the customer's need.

PMR

Electrical Specifications

Frequency Band (MHz)	380 ÷ 470
Channel Spacing (MHz)	> 4
Impedance (Ω)	50
VSWR	< 1.4:1
Continuous Max. Power (W)	100
TX-RX Insertion Loss (dB)	≤ 1.2
TX-RX Isolation (dB)	≥ 80
Operation Temp. Range ($^{\circ}\text{C}$)	-20 $^{\circ}$ ÷ +60 $^{\circ}$

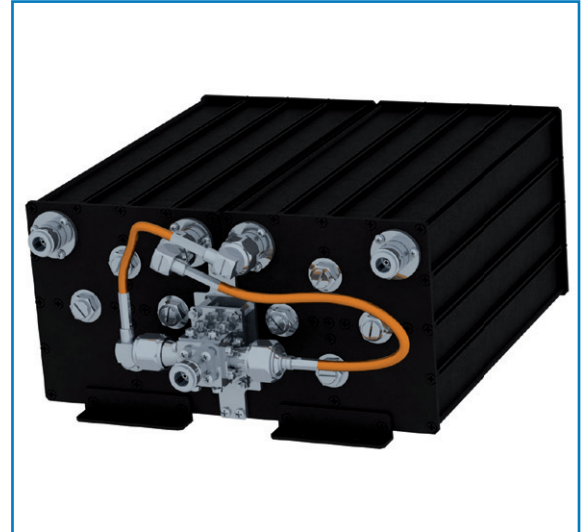

Mechanical Specifications

Connectors	Nf
Dimensions (mm)	170 × 124 × 250
Weight (kg)	< 4
Material	Aluminium Alloy

PRELIMINARY



Made in Italy. We reserve the right to modify these data without any notice.