



TETRA DUPLEXER

430 ÷ 470 MHz

T06210736


POLOMARCONI.IT

POLOMARCONI offers a very wide range of wireless products. Our products can be tailored according to the customer's need.

PMR

Electrical Specifications


| | |
|--|----------------|
| Frequency band (MHz) | 430 ÷ 470 |
| Impedance (Ω) | 50 |
| Insertion Loss (dB) | ≤ 2 |
| Tx/Rx Isolation (dB) | ≥ 73 |
| Return Loss (dB) | ≥ 19 |
| Continuous Max. Power (W) | 100 |
| Bandwidth (MHz) | 3 |
| Rx /Tx Distance (MHz) | > 10 |
| Out-Band Attenuation up to 2.8 GHz (dB) | > 40 |
| Operating Temp. Range ($^{\circ}\text{C}$) | $-10 \div +60$ |

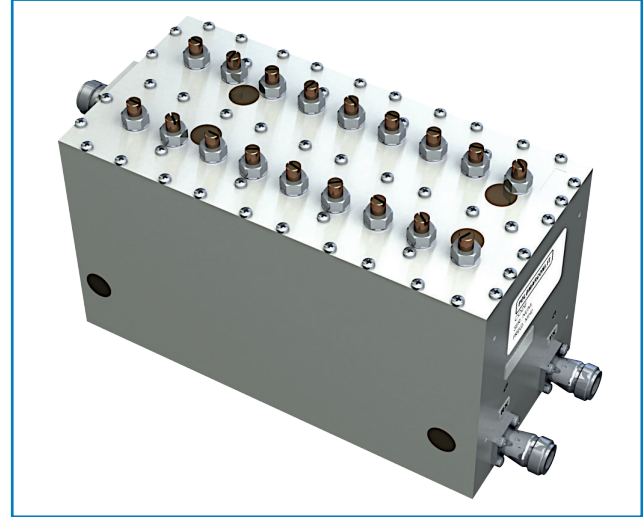

Mechanical Specifications

| | |
|-----------------|------------------|
| Connectors | 3 x N f |
| Dimensions (mm) | 197 x 95 x 130 |
| Weight (kg) | 2.8 |
| Material | Alluminium Alloy |
| Finishing | Silver Plated |

Dimensions

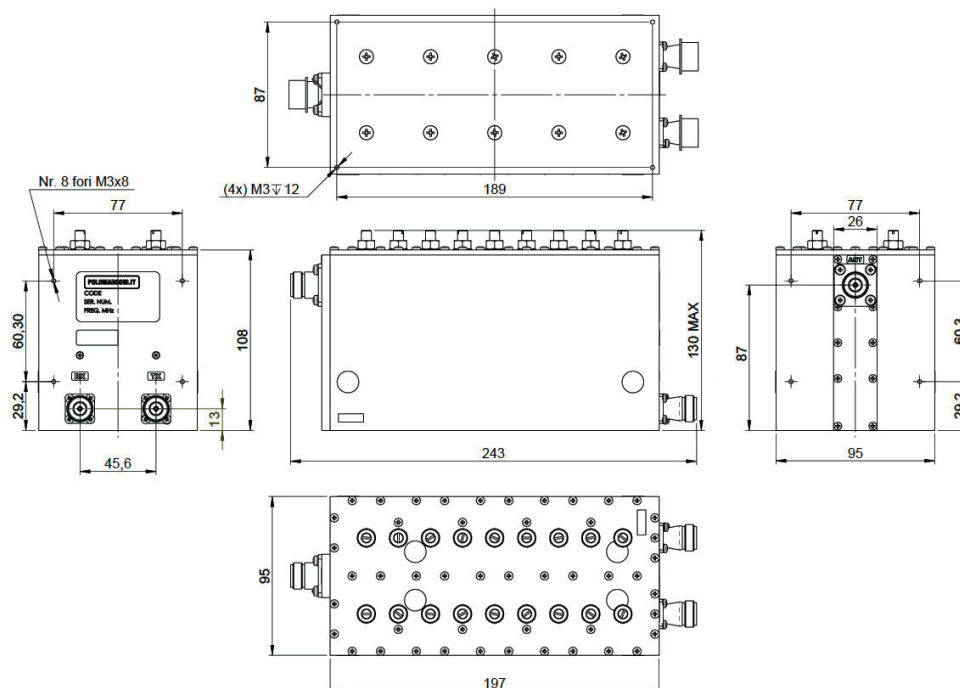

Made in Italy. We reserve the right to modify these data without any notice.

C2-PUBLIC