

2 WAYS DOUBLE SYMMENTRICAL SPLITTER

75 / 170 MHz


T07211601

PMR



POLOMARCONI offers a very wide range of wireless products. Our products can be tailored according to the customer's need

| Electrical Specifications | |
|----------------------------------|--------------------|
| Frequency Channels (MHz) | 75 / 170 |
| Impedance (Ω) | 50 |
| Return Loss (dB) | ≥ 15 |
| Max Rated Power (W) | 50 |
| Insertion Loss (dB) | \leq 3 \pm 0.5 |
| Isolation (dB) beetween channels | ≥ 20 |
| Operating Temp. Range (°C) | -20° ÷ +70° |
| | |

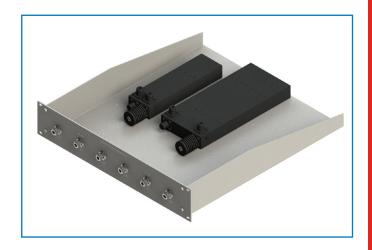

| Mechanical Specifications | |
|---------------------------|------------------|
| Connectors | Nf |
| Dimensions | 2U x 19"× 500 mm |
| Weight (kg) | < 5 |
| Color (Front Panel) | RAL7035 |

Frontal view

