



2 WAYS QUADRUPLE ASYMMETRICAL SPLITTER

75 / 170 / 410 / 460 MHz, -0.5/-10 dB

T07211802

POLOMARCONI.IT

POLOMARCONI offers a very wide range of wireless products. Our products can be tailored according to the customer's need.

PMR

Electrical Specifications


Frequency Channels (MHz)	75 / 170 / 410 / 460
Impedance (Ω)	50
Return Loss (dB)	≥ 15
Max Rated Power (W)	25
Insertion Loss (dB)	≤ 0.5
Outputs Unbalancing (dB)	-0.5 \pm 0.1 -10 \pm 0.3
Isolation (dB) between channels	≥ 20
Operating Temp. Range ($^{\circ}\text{C}$)	-20 \div +70



Mechanical Specifications

Connectors	Nf
Dimensions	2U x19" x 500 mm
Weight (kg)	< 7.0
Color (Frontal Panel)	RAL7035

Electric Schematics

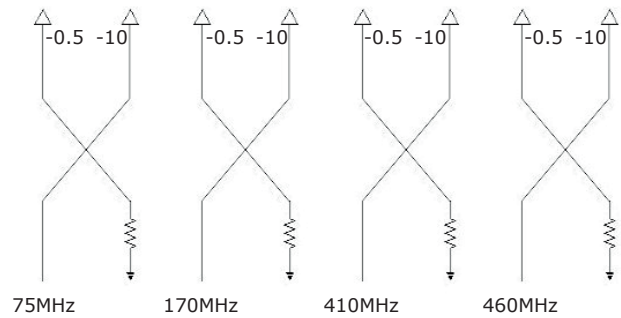

Frontal view

