



## 2 WAYS TRIPLE ASYMMETRICAL SPLITTER

75 / 170 / 410 MHz, -0.5 dB / -10 dB

T07311602

POLOMARCONI.IT




POLOMARCONI offers a very wide range of wireless products.  
Our products can be tailored according to the customer's need.

PMR

### Electrical Specifications

Frequency Channels (MHz)	75 / 170 / 410
Impedance ( $\Omega$ )	50
Return Loss (dB)	$\geq 15$
Insertion Loss (dB)	05
OUTPUTS Unbalancing (dB)	$-0.5 \pm 0.1$ $-10 \pm 0.3$
Isolation (dB) between channels	$\geq 20$
Continuous Max. Power (W)	50
Operating Temp. Range ( $^{\circ}\text{C}$ )	$-20^{\circ} \div +70^{\circ}$

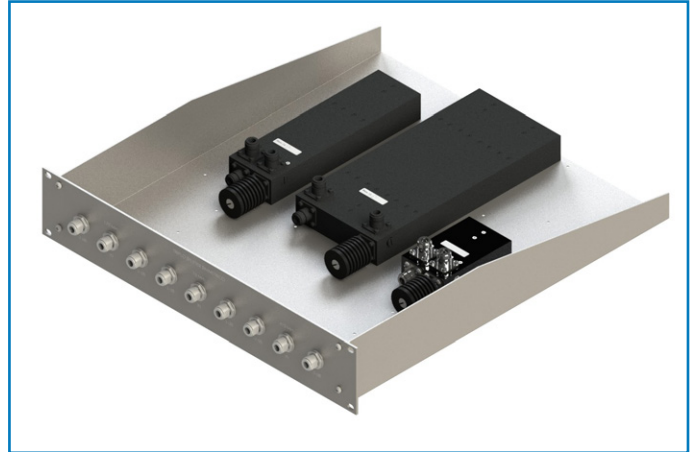

### Mechanical Specifications

Connectors	Nf
Dimensions	2U x19" x 500 mm
Weight (kg)	< 7.5
Color (Frontal Panel)	RAL7035

### Frontal view

