



3 WAYS UHF CIRCULATOR

400 ÷ 470 MHz

T19150701

POLOMARCONI.IT




POLOMARCONI offers a very wide range of wireless products. Our products can be tailored according to the customer's need.

PMR


Electrical Specifications

Frequency Band (MHz)	400 ÷ 470
Impedance (Ω)	50
Return Loss (dB)	≥ 22
Continuous Max. Power (W)	70
Insertion Loss (dB)	≤ 0.4
Isolation (dB)	≥ 24
Operating Temp. Range ($^{\circ}\text{C}$)	$-10^{\circ} \div +55^{\circ}$

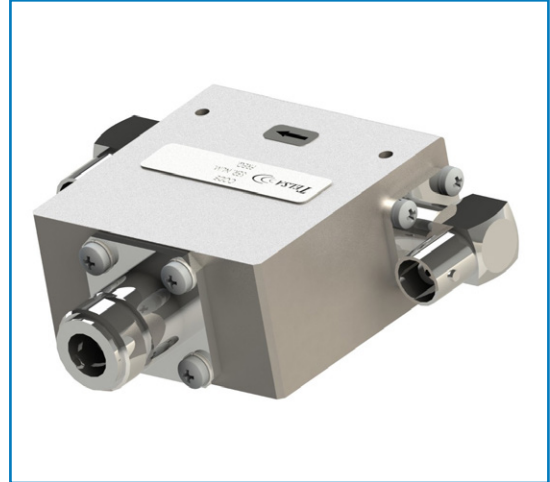

Mechanical Specifications

Connectors	1 N f 2 BNC f
Dimensions (mm)	see table
Weight (g)	< 250
Fixing	Nr. 2 holes for each side M3 x L=6mm depth

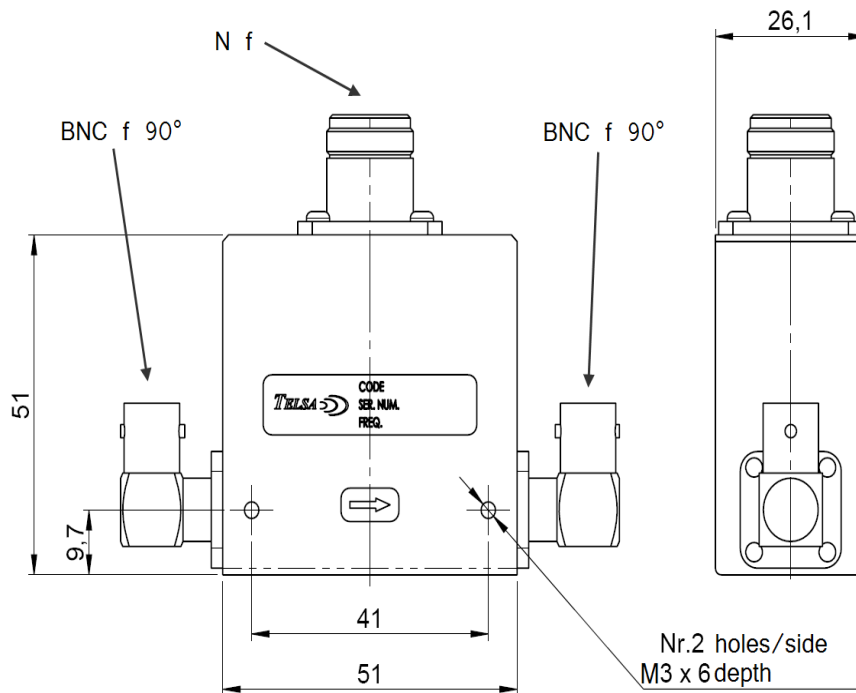

Dimensions (mm)



Made in Italy. We reserve the right to modify these data without any notice.