



UHF ISOLATOR WITH DOUBLE CIRCULATOR

225 ÷ 400 MHz, 100W

T19530602


POLOMARCONI.IT

POLOMARCONI offers a very wide range of wireless products.
Our products can be tailored according to the customer's need.

ATC

Electrical Specifications

Frequency Band (MHz)	225 ÷ 400
Impedance (Ω)	50
VSWR	< 1.5:1
Continuous Max. Power (W)	100
Reflected Max. Power (W)	50
Insertion Loss (dB)	≤ 1.5
Isolation (dB)	≥ 38
Operating Temp. Range ($^{\circ}\text{C}$)	-10 ÷ +55

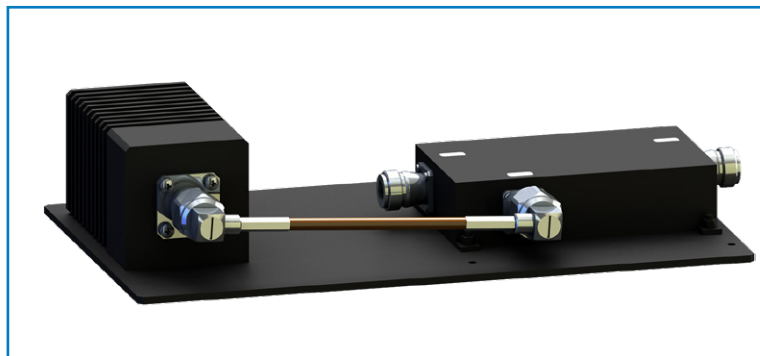

Mechanical Specifications

Connectors	Nf
Dimensions (mm)	250 × 145 × 53
Weight (g)	< 950
Colour	RAL 9011

Dimensions (mm)

